

Cover (for concrete infilling)



fig. 1



fig. 2

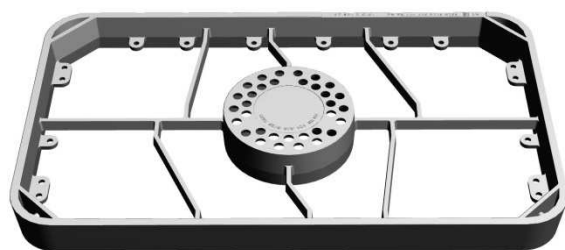


fig. 3

Type	Dimensions [mm]	Art. No.	Package unit
Cover (for concrete infilling) without ribs	1000 x 600	4003	12
Cover (for concrete infilling) with ribs	1000 x 600	4004	12
Oprawa z żebrami i wietrznikiem	1000 x 600	4005	12

Cover 1000 x 600 for concrete infilling
Used in telecommunication chamber tops.

Wall thickness: 15 mm

Material: grey cast iron

External dimensions: 1000 x 600

Covers adjust perfectly to the frames, which ensures uniform load transmission.

We produce three type of cover element:

Cover for concrete infilling without the ribs (fig.1).

Cover for concrete infilling with the ribs (fig. 2).

Cover for concrete infilling with the ribs and vent holes (fig. 3).

Vents area: min.90 cm². Oprawa występuje w trzech odmianach:

Applying: for production of the telecommunication chamber tops. The Constructor/Producer of the complete telecommunication chamber top is responsible for choosing the appropriate cover and frame.

Note: the appropriate reinforcement of the cover construction and the appropriate choosing of the concrete rests on the Contractor.

Guarantee for the product: 36 months.